High Power LED Projector/HLP-1



Specifications are subject to change without prior notice


Projector light embedded high power LED light source. With our unique optical design, achieved higher efficiency than ordinary products.

[Sample]

Focal length of collimated lens: f=200mm


Beam angle: 1.5 degree (at half illuminance)

Projection distance :30m Bright area : ϕ 680mm Intensity : 500lx(ave)

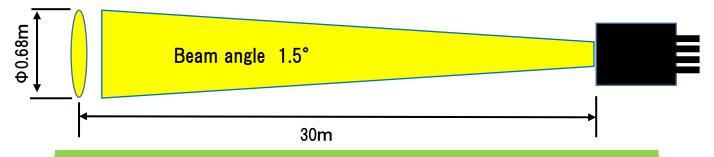

Various shapes of bright area can be materialize by the shape of aperture inside.





Oval Square

Appearance View



Specification

Dimension : φ156mmx275mm

Weight: 3.7kg

Power Consumption: approx. 50W

Projection Lens: Acrylic Fresnel Lens

Illuminance intensity: 500Lx (ave.)

NACACUE CORP.

Higashitsuchikawa-cho, Kuze, Minami-ku,

Kyoto 601-8204, JAPAN.

Tel. +81-75-934-4178

Tax. +81-75-934-1870

http://www.nacacue.co.jp